

Product Data Sheet

HD 6/13 C Plus & HD 6/13 CX Plus

Cold water pressure cleaners for daily commercial use.

Designed for high performance cleaning of machinery, vehicles or yards on a daily basis. High water flow and pressure rates ensure thorough cleaning results even with stubborn dirt, while the variable pressure and water flow rate ensure quick, efficient results. Featuring a dirtblaster nozzle for faster cleaning of tough dirt, and a three-way nozzle that enables the water jet to be adjusted quickly between a high-pressure pencil jet, a high-pressure fan jet and a low-pressure fan jet. Ideal for fast and tough cleaning jobs on the farm, in the workshop and in car fleets and dealerships.



HD 6/13 C Plus

HD 6/13 CX Plus

Features and Benefits:

- Integrated hose reel with 15m high-pressure hose. (CX only)
- 3 piston axial pump with brass water inlet and cylinder head for long service life.
- Automatic pressure controlled shutdown upon trigger release for low energy consumption.
- Adjustable aluminium push handle provides easy manoeuvrability and accessory storage.
- Easy Press trigger gun, ergonomically shaped to reduce operator fatigue.
- Integrated accessory storage on the back of the unit with additional cable fixing.
- Dirtblaster nozzle increasing cleaning performance and covering a larger area.
- Triple nozzle providing optimum cleaning flexibility and effortless change over of cleaning jets.



Range Comparison

Kärcher HD compact cold water pressure cleaners



Accessories

Standard accessories



Hp hose (10 m)
(C only)
6.391-238.0

Hp hose (15m)
(CX only)
6.391-417.0


EASY press
trigger gun
4.775-529.0

Stainless steel spray
lance (550mm)
4.760-665.0

Triple nozzle
(0°/25°/40°)
4.767-148.0

Dirtblaster
4.763-252.0

Optional accessories

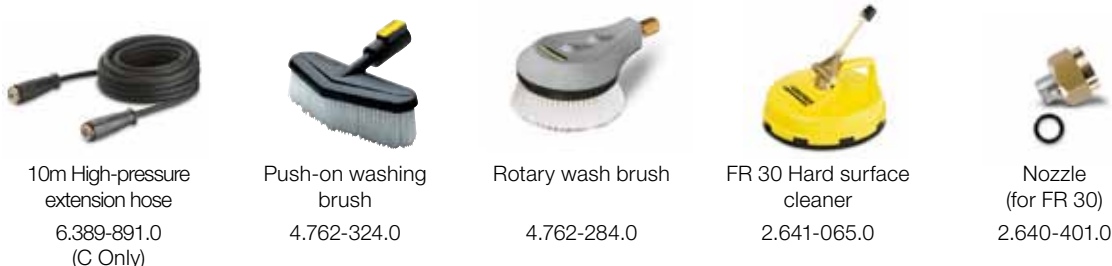

10m High-pressure
extension hose
6.389-891.0
(C Only)

Push-on washing
brush
4.762-324.0

Rotary wash brush
4.762-284.0

FR 30 Hard surface
cleaner
2.641-065.0

Nozzle
(for FR 30)
2.640-401.0

Technical Specification

	HD 6/13 C Plus	HD 6/13 CX Plus
Power supply (Ph/V/Hz)	1/240/50	1/240/50
Water flow rate (l/h)	230-560	230-560
Pressure (bar/MPa)	30-130/3-13	30-130/3-13
Max. water feed temp (°C)	60	60
Connected load (kW)	2.7	2.7
Weight (kg)	24.5	29.2
Dimensions (L x W x H) (mm)	375 x 360 x 935	375 x 360 x 935
Part Number	1.514-208.0	1.514-653.0



Tel: + 44 (0) 1295 752 082

Kärcher (UK) Ltd, Beaumont Road,
Banbury, Oxfordshire OX16 1TB
info@karcher.co.uk www.karcher.co.uk

Tel: +353 (0) 1 409 7777

Kärcher Ltd (Ireland), Unit 4,
EP Mooney Business Park,
Walkinstown, Dublin 12
info@ie.karcher.com www.karcher.ie